



Nominal Impedance: 4--8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 106 db
Frequency Range: 2KHZ-16KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Size: 25*7
Overall Diameter: 58.0mm
Overall Depth: 75.0mm
Net Weight: 0.56kg

30-1001



Nominal Impedance: 4--8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 106 db
Frequency Range: 2KHZ-16KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Size: 25*7
Overall Diameter: 58.0mm
Overall Depth: 75.0mm
Net Weight: 0.56kg


30-1002



Nominal Impedance: 4--8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 106 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Ronud copper wire
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Size: 70*32*10
Overall Diameter: 97.0mm
Overall Depth: 45.0mm
Net Weight: 0.5kg

30-1003

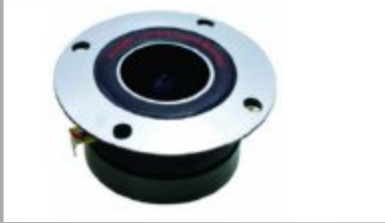

Nominal Impedance: 4--8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 106 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Ronud copper wire
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Size: 70*32*10
Overall Diameter: 97.0mm
Overall Depth: 45.0mm
Net Weight: 0.5kg


30-1004



Nominal Impedance: 4--8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 103 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Ronud copper wire
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Weight: 5.2 Oz
Overall Diameter: 97.0mm
Overall Depth: 45.0mm
Net Weight: 0.4kg

30-1005

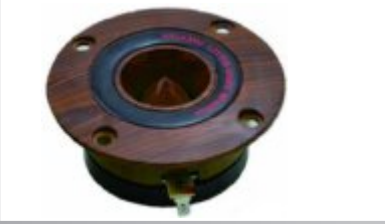

Nominal Impedance: 4--8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 106 db
Frequency Range: 2KHZ-16KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Ronud copper wire
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Plastic
Magnet Weight: 5.2Oz
Overall Diameter: 97.0mm
Overall Depth: 45.0mm
Net Weight: 0.4kg

30-1006



Nominal Impedance: 4--8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 106 db
Frequency Range: 2KHZ-16KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Ronud copper wire
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Plastic
Magnet Weight: 5.2Oz
Overall Diameter: 97mm
Overall Depth: 45mm
Net Weight: 0.4kg


30-1007



Nominal Impedance: 4--8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 106 db
Frequency Range: 2KHZ-16KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Ronud copper wire
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Weight: 7.8Oz
Overall Diameter: 80.0mm
Overall Depth: 63.0mm
Net Weight: 0.5kg

30-1008

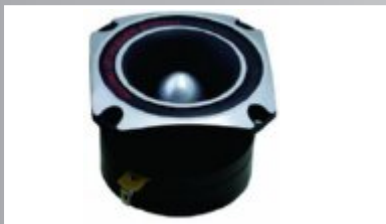

Nominal Impedance: 4--8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 106 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Ronud copper wire
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Weight: 7.8Oz
Overall Diameter: 80.0mm
Overall Depth: 63.0mm
Net Weight: 0.8kg

30-1009



Nominal Impedance: 4--8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 105 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Ronud copper wire
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Plastic
Magnet Weight: 7.8Oz
Overall Diameter: 80.0mm
Overall Depth: 63.0mm
Net Weight: 0.5kg

30-1010



Nominal Impedance: 4--8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 106 db
Frequency Range: 2KHZ-16KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Ronud copper wire
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Plastic
Magnet Weight: 7.8Oz
Overall Diameter: 80.0mm
Overall Depth: 63.0mm
Net Weight: 0.5kg

30-1011



Nominal Impedance: 4--8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 105 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Ronud copper wire
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Weight: 5.2Oz
Overall Diameter: 95.0mm
Overall Depth: 40.0mm
Net Weight: 0.5kg

30-1012



Nominal Impedance: 4--8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 110 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Size: 25*7
Overall Diameter: 79.0mm
Overall Depth: 52.0mm
Net Weight: 0.55kg

30-1013



Nominal Impedance: 4--8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 109 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Size: 25*7
Overall Diameter: 79.0mm
Overall Depth: 53.0mm
Net Weight: 0.55kg

30-1014



Nominal Impedance: 4--8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 109 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Size: 25*7
Overall Diameter: 79.0mm
Overall Depth: 53.0mm
Net Weight: 0.55kg

30-1015



Nominal Impedance: 4--8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 109 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Size: 25*7
Overall Diameter: 79.0mm
Overall Depth: 53.0mm
Net Weight: 0.55kg

30-1016



Nominal Impedance: 4--8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 106 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Ronud copper wire
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Weight: 5.2Oz
Overall Diameter: 100.0mm
Overall Depth: 85mm
Net Weight: 0.6kg

30-1017



Nominal Impedance: 4--8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 106 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Weight: 15.6Oz
Overall Diameter: 89.0mm
Overall Depth: 78.0mm
Net Weight: 1.4kg

30-1018



Nominal Impedance: 4--8ohm
Power Capacity: 25 RMS W
Sensitivity (1w/1m): 102 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Size: 25*7
Overall Diameter: 58.0mm
Overall Depth: 59.5mm
Net Weight: 0.5kg

30-1019



Nominal Impedance: 4--8ohm
Power Capacity: 25 RMS W
Sensitivity (1w/1m): 102 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Size: 25*7
Overall Diameter: 70.0mm
Overall Depth: 79.0mm
Net Weight: 0.6kg

30-1020



Nominal Impedance: 4--8ohm
Power Capacity: 25 RMS W
Sensitivity (1w/1m): 102 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Size: 25*7
Overall Diameter: 70.0mm
Overall Depth: 79.0mm
Net Weight: 0.6kg


30-1021



Nominal Impedance: 4--8ohm
Power Capacity: 25 RMS W
Sensitivity (1w/1m): 102 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Size: 25*7
Overall Diameter: 58.0mm
Overall Depth: 59.5mm
Net Weight: 0.6kg

30-1022

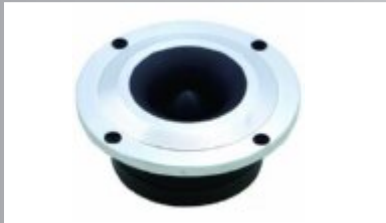

Nominal Impedance: 4--8ohm
Power Capacity: 25 RMS W
Sensitivity (1w/1m): 102 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Ronud copper wire
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Weight: 5..2Oz
Overall Diameter: 95.0mm
Overall Depth: 40.0mm
Net Weight: 0.52kg

30-1023



Nominal Impedance: 4--8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 106 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Ronud copper wire
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Weight: 5..2Oz
Overall Diameter: 100.0mm
Overall Depth: 85.0mm
Net Weight: 0.6kg

30-1024



Nominal Impedance: 4--8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 106 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Ronud copper wire
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Weight: 7.8Oz
Overall Diameter: 89.0mm
Overall Depth: 78.0mm
Net Weight: 0.53kg

30-1025



Nominal Impedance: 4--8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 105 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Ronud copper wire
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Weight: 5.2Oz
Overall Diameter: 95.0mm
Overall Depth: 40.0mm
Net Weight: 0.5kg

30-1026



Nominal Impedance: 4--8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 105 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Ronud copper wire
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Weight: 5.2Oz
Overall Diameter: 95.0mm
Overall Depth: 40.0mm
Net Weight: 0.5kg

30-1027



Nominal Impedance: 4--8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 106 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Ronud copper wire
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Weight: 5.2Oz
Overall Diameter: 100.0mm
Overall Depth: 40.0mm
Net Weight: 0.6kg

30-1028



Nominal Impedance: 4--8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 105 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 32.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Size: 32*16*7
Overall Diameter: 100.5mm
Overall Depth: 47.0mm
Net Weight: 0.6kg

30-1029



Nominal Impedance: 4--8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 106 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Weight: 5.2Oz
Overall Diameter: 100.0mm
Overall Depth: 85.0mm
Net Weight: 0.6kg

30-1030



Nominal Impedance: 4--8ohm
Power Capacity: 38 RMS W
Sensitivity (1w/1m): 105 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 37.6mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Weight: 11.3Oz
Overall Diameter: 103.0mm
Overall Depth: 69.0mm
Net Weight: 1.3kg

30-1031



Nominal Impedance: 4--8ohm
Power Capacity: 38 RMS W
Sensitivity (1w/1m): 105 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 37.6mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Weight: 11.3Oz
Overall Diameter: 103.0mm
Overall Depth: 69.0mm
Net Weight: 1.3kg

30-1032



Nominal Impedance: 4--8ohm
Power Capacity: 38 RMS W
Sensitivity (1w/1m): 105 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 37.6mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Weight: 11.3Oz
Overall Diameter: 103.0mm
Overall Depth: 69.0mm
Net Weight: 1.3kg

30-1033



Nominal Impedance: 4--8ohm
Power Capacity: 40 RMS W
Sensitivity (1w/1m): 105 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 44.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Weight: 11.3Oz
Overall Diameter: 100.0mm
Overall Depth: 75.0mm
Net Weight: 1.5kg

30-1034



Nominal Impedance: 4--8ohm
Power Capacity: 40 RMS W
Sensitivity (1w/1m): 102 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 44.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Size: 17.3 Oz
Overall Diameter: 110.0mm
Overall Depth: 75.0mm
Net Weight: 2.2kg

30-1035



Nominal Impedance: 4--8ohm
Power Capacity: 40 RMS W
Sensitivity (1w/1m): 102 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 44.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Size: 17.3 Oz
Overall Diameter: 110.0mm
Overall Depth: 75.0mm
Net Weight: 2.2kg

30-1036



Nominal Impedance: 4--8ohm
Power Capacity: 40 RMS W
Sensitivity (1w/1m): 102 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 44.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Size: 11.3 Oz
Overall Diameter: 100.0mm
Overall Depth: 75.0mm
Net Weight: 1.5kg

30-1037



Nominal Impedance: 4--8ohm
Power Capacity: 40 RMS W
Sensitivity (1w/1m): 102 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 44.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Size: 11.3 Oz
Overall Diameter: 100.0mm
Overall Depth: 75.0mm
Net Weight: 1.5kg

30-1038



Nominal Impedance: 4--8ohm
Power Capacity: 40 RMS W
Sensitivity (1w/1m): 106 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 44.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Size: 17.2 Oz
Overall Diameter: 110.0mm
Overall Depth: 75.0mm
Net Weight: 2.2kg

30-1039



Nominal Impedance: 4--8ohm
Power Capacity: 40 RMS W
Sensitivity (1w/1m): 106 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 44.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Size: 11.3 Oz
Overall Diameter: 100.0mm
Overall Depth: 75.0mm
Net Weight: 1.4kg

30-1040



Nominal Impedance: 4--8ohm
Power Capacity: 40 RMS W
Sensitivity (1w/1m): 106 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 44.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Size: 11.3 Oz
Overall Diameter: 90.0mm
Overall Depth: 75.0mm
Net Weight: 1.5kg

30-1041



Nominal Impedance: 4--8ohm
Power Capacity: 43 RMS W
Sensitivity (1w/1m): 100 db
Frequency Range: 2KHZ-16KHZ
Voice Coil Diameter: 44.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Size: 33 Oz
Overall Diameter: 168.0mm
Overall Depth: 92.0mm
Net Weight: 2.3kg

30-1042



Nominal Impedance: 4--8ohm
Power Capacity: 43 RMS W
Sensitivity (1w/1m): 100 db
Frequency Range: 2KHZ-16KHZ
Voice Coil Diameter: 46.0mm
Voice coil Material: Round copper wire
Voice Coil Former: KSV

Diaphragm Material: Phenolic
Housing Material: Plastic
Magnet Weight: 23 Oz
Overall Diameter: 125.0mm
Overall Depth: 63.0mm
Net Weight: 1.4 kg

30-1043



Nominal Impedance: 4--8ohm
Power Capacity: 43 RMS W
Sensitivity (1w/1m): 110 db
Frequency Range: 2KHZ-16KHZ
Voice Coil Diameter: 46.0 mm
Voice coil Material: Round copper wire
Voice Coil Former: KSV

Diaphragm Material: Phenolic
Housing Material: Plastic
Magnet Weight: 10.5Oz
Overall Diameter: 128.0mm
Overall Depth: 90.0mm
Net Weight: 1.5kg

30-1044



Nominal Impedance: 4--8ohm
Power Capacity: 45 RMS W
Sensitivity (1w/1m): 102 db
Frequency Range: 2KHZ-16KHZ
Voice Coil Diameter: 50.8mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Phenolic
Housing Material: Aluminum
Magnet Weight: 10.5 Oz
Overall Diameter: 120.0mm
Overall Depth: 52.0 mm
Net Weight: 1.25 kg

30-1045



Nominal Impedance: 4--8ohm
Power Capacity: 45 RMS W
Sensitivity (1w/1m): 105 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 50.8mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Weight: 10.5 Oz
Overall Diameter: 120.0mm
Overall Depth: 52.0mm
Net Weight: 1.25 kg

30-1046



Nominal Impedance: 4--8ohm
Power Capacity: 48 RMS W
Sensitivity (1w/1m): 105 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 62.0mm
Voice coil Material: Round copper wire
Voice Coil Former: KSV

Diaphragm Material: Phenolic
Housing Material: Plastic
Magnet Weight: 39.8 Oz
Overall Diameter: 180.5 mm
Overall Depth: 79.2 mm
Net Weight: 5kg

30-1047



Nominal Impedance: 4--8ohm
Power Capacity: 50 RMS W
Sensitivity (1w/1m): 110 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 72.0 mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Weight: 45.5 Oz
Overall Diameter: 155.0mm
Overall Depth: 77.0mm
Net Weight: 5.8kg

30-1048

TWEETER



Nominal Impedance: 4--8ohm
Power Capacity: 50 RMS W
Sensitivity (1w/1m): 110 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 72.0 mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Weight:45.5 Oz
Overall Diameter: 155.0mm
Overall Depth: 77.0mm
Net Weight: 5.8 kg

30-1049



Nominal Impedance: 4--8ohm
Power Capacity: 50 RMS W
Sensitivity (1w/1m): 110 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 72.0mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Weight: 45.5 Oz
Overall Diameter: 180.0mm
Overall Depth: 120.0mm
Net Weight: 45.5kg

30-1050




Nominal Impedance: 4--8ohm
Power Capacity: 50 RMS W
Sensitivity (1w/1m): 110 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 72.0mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Weight: 45.5 Oz
Overall Diameter: 180.0mm
Overall Depth: 120.0mm
Net Weight: 45.5kg

30-1051


TWEETER

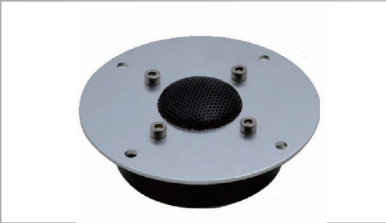

Nominal Impedance: 4--8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 106 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Round copper wire
Voice Coil Former: KSV

Diaphragm Material: Silk
Housing Material: Aluminum
Magnet Weight:5.2 Oz
Overall Diameter: 110.0mm
Overall Depth: 38.0mm
Net Weight: 0.55kg

30-1052

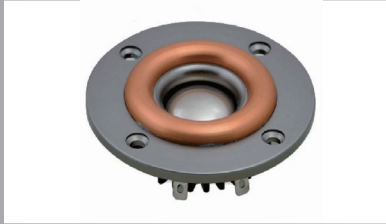

Nominal Impedance: 4--8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 108 db
Frequency Range: 2KHZ-16KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Silk
Housing Material: Aluminum
Magnet Size: 25*3
Overall Diameter: 80.0mm
Overall Depth: 24.0mm
Net Weight: 0.2 kg

30-1053



Nominal Impedance: 4--8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 107 db
Frequency Range: 2KHZ-16KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Silk
Housing Material: Aluminum
Magnet Size: 25*3
Overall Diameter: 88.0mm
Overall Depth: 24.0mm
Net Weight: 0.25kg

30-1054



Nominal Impedance: 4--8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 103 db
Frequency Range: 2KHZ-16KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Round copper wire
Voice Coil Former: KSV

Diaphragm Material: Silk
Housing Material: Plastic
Magnet Weight: 7.8 Oz
Overall Diameter: 100.0mm
Overall Depth: 32.6mm
Net Weight: 0.56 kg

30-1055



Nominal Impedance: 4--8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 103 db
Frequency Range: 2KHZ-16KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Round copper wire
Voice Coil Former: KSV

Diaphragm Material: Silk
Housing Material: Plastic
Magnet Weight: 7.8 Oz
Overall Diameter: 100.0mm
Overall Depth: 39.0mm
Net Weight: 0.58kg

30-1056



Nominal Impedance: 4--8ohm
Power Capacity: 25 RMS W
Sensitivity (1w/1m): 102 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Round copper wire
Voice Coil Former: KSV

Diaphragm Material: Silk
Housing Material: Plastic
Magnet Weight: 7.8 Oz
Overall Diameter: 100.0mm
Overall Depth: 39.0mm
Net Weight: 0.58kg

30-1057

TWEETER



Nominal Impedance: 4--8ohm
Power Capacity: 25 RMS W
Sensitivity (1w/1m): 102 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Silk
Housing Material: Plastic
Magnet Weight: 7.8 Oz
Overall Diameter: 103.0mm
Overall Depth: 35.8mm
Net Weight: 0.6kg

30-1058



Nominal Impedance: 4--8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 105 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Round copper wire
Voice Coil Former: KSV

Diaphragm Material: Silk
Housing Material: Plastic
Magnet Weight: 7.8 Oz
Overall Diameter: 103.0mm
Overall Depth: 35.8mm
Net Weight: 0.6kg

30-1059



Nominal Impedance: 4--8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 106 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Round copper wire
Voice Coil Former: KSV

Diaphragm Material: Silk
Housing Material: Plastic
Magnet Weight: 7.8 Oz
Overall Diameter: 103.2mm
Overall Depth: 40.5mm
Net Weight: 0.6kg

30-1060



Nominal Impedance: 4--8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 106 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Round copper wire
Voice Coil Former: KSV

Diaphragm Material: Silk
Housing Material: Plastic
Magnet Weight: 7.8 Oz
Overall Diameter: 100.0mm
Overall Depth: 35.8mm
Net Weight: 0.6kg

30-1061

TWEETER



Nominal Impedance: 4--8ohm
Power Capacity: 15 RMS W
Sensitivity (1w/1m): 90 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 13.28mm
Voice coil Material: Round copper wire
Voice Coil Former: KSV

Diaphragm Material: Poyester
Housing Material: Plastic
Magnet Size: 12.8*2
Overall Diameter: 39.7mm
Overall Depth: 19.6mm
Net Weight: 0.02kg

30-1062



Nominal Impedance: 4--8ohm
Power Capacity: 17 RMS W
Sensitivity (1w/1m): 90 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 19.4mm
Voice coil Material: Round copper wire
Voice Coil Former: KSV

Diaphragm Material: Silk
Housing Material: Plastic
Magnet Size: 19*3
Overall Diameter: 36.2mm
Overall Depth: 24.3mm
Net Weight: 0.03kg

30-1063



Nominal Impedance: 4--8ohm
Power Capacity: 20 RMS W
Sensitivity (1w/1m): 90 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 19.4mm
Voice coil Material: Round copper wire
Voice Coil Former: KSV

Diaphragm Material: Silk edge Titanium
Housing Material: Plastic
Magnet Size: 25*3
Overall Diameter: 43.7mm
Overall Depth: 30.5mm
Net Weight: 0.05kg

30-1064



Nominal Impedance: 4--8ohm
Power Capacity: 20 RMS W
Sensitivity (1w/1m): 90 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Silk edge Titanium
Housing Material: Aluminum
Magnet Size: 25*5
Overall Diameter: 57.4mm
Overall Depth: 38.8mm
Net Weight: 0.13kg

30-1065



Nominal Impedance: 4--8ohm
Power Capacity: 20 RMS W
Sensitivity (1w/1m): 90 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 13.28mm
Voice coil Material: Round copper wire
Voice Coil Former: KSV

Diaphragm Material: Poyester
Housing Material: Plastic
Magnet Size: 12.8*2
Overall Diameter: 54.5mm
Overall Depth: 22.2mm
Net Weight: 0.03kg

30-1066



Nominal Impedance: 4--8ohm
Power Capacity: 20 RMS W
Sensitivity (1w/1m): 90 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Round copper wire
Voice Coil Former: KSV

Diaphragm Material: Silk
Housing Material: Plastic
Magnet Size: 25*3
Overall Diameter: 47.0mm
Overall Depth: 30.5mm
Net Weight: 0.07kg

30-1067

TWEETER



Nominal Impedance: 4--8ohm
Power Capacity: 20 RMS W
Sensitivity (1w/1m): 90 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Round copper wire
Voice Coil Former: KSV

Diaphragm Material: Silk
Housing Material: Plastic
Magnet Size: 25*3
Overall Diameter: 54.0mm
Overall Depth: 27.0mm
Net Weight: 0.05kg

30-1068



Nominal Impedance: 4--8ohm
Power Capacity: 20 RMS W
Sensitivity (1w/1m): 90 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Silk edge titanium
Housing Material: Plastic
Magnet Size: 25*3
Overall Diameter: 54.5mm
Overall Depth: 27.0mm
Net Weight: 0.06kg

30-1069



Nominal Impedance: 4--8ohm
Power Capacity: 20 RMS W
Sensitivity (1w/1m): 90 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Round copper wire
Voice Coil Former: KSV

Diaphragm Material: Silk
Housing Material: Plastic
Magnet Size: 25*3
Overall Diameter: 60.7mm
Overall Depth: 32.5mm
Net Weight: 0.05kg


30-1070



Nominal Impedance: 4--8ohm
Power Capacity: 20 RMS W
Sensitivity (1w/1m): 90 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Round copper wire
Voice Coil Former: CCAW

Diaphragm Material: Silk edge Titanium
Housing Material: Aluminum
Magnet Size: 25*3
Overall Diameter: 57.3mm
Overall Depth: 22.7mm
Net Weight: 0.10kg

30-1071

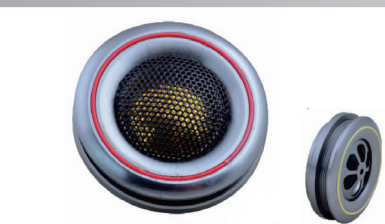

Nominal Impedance: 4--8ohm
Power Capacity: 20 RMS W
Sensitivity (1w/1m): 90 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Silk edge Titanium
Housing Material: Aluminum
Magnet Size: 25*3
Overall Diameter: 110.0mm
Overall Depth: 75.0mm
Net Weight: 2.20kg

30-1072



Nominal Impedance: 4--8ohm
Power Capacity: 20 RMS W
Sensitivity (1w/1m): 90 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Silk
Housing Material: Aluminum
Magnet Size: 25*3
Overall Diameter: 65.0mm
Overall Depth: 42.6mm
Net Weight: 0.13kg

30-1073

TWEETER



Nominal Impedance: 4--8ohm
Power Capacity: 20 RMS W
Sensitivity (1w/1m): 90 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Silk
Housing Material: Plastic
Magnet Size: 25*3
Overall Diameter: 58.9mm
Overall Depth: 28.0mm
Net Weight: 0.06kg


30-1074



Nominal Impedance: 4--8ohm
Power Capacity: 20 RMS W
Sensitivity (1w/1m): 90 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Silk
Housing Material: Plastic
Magnet Size: 25*3
Overall Diameter: 57.0mm
Overall Depth: 27.3mm
Net Weight: 0.06kg

30-1075

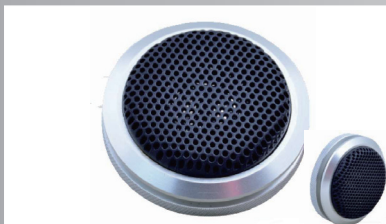

Nominal Impedance: 4--8ohm
Power Capacity: 20 RMS W
Sensitivity (1w/1m): 90 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Silk
Housing Material: Aluminum
Magnet Size: 25*3
Overall Diameter: 57.0mm
Overall Depth: 23.1mm
Net Weight: 0.11kg


30-1076



Nominal Impedance: 4--8ohm
Power Capacity: 20 RMS W
Sensitivity (1w/1m): 90 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Silk edge Titanium
Housing Material: Aluminum
Magnet Size: 25*3
Overall Diameter: 56.0mm
Overall Depth: 26.5mm
Net Weight: 0.1kg

30-1077

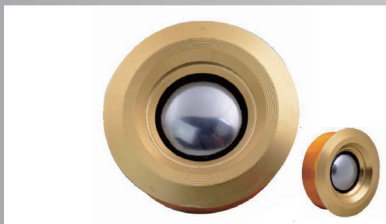

Nominal Impedance: 4--8ohm
Power Capacity: 20 RMS W
Sensitivity (1w/1m): 90 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Silk edge Titanium
Housing Material: Aluminum
Magnet Size: 25*3
Overall Diameter: 57.3mm
Overall Depth: 22.7mm
Net Weight: 0.1kg

30-1078