


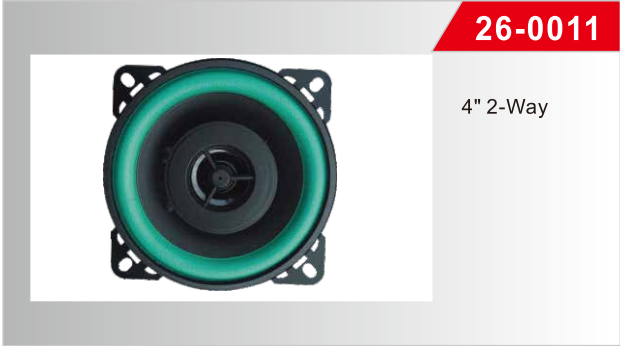


Car Economic Speaker

Type	Woofer cone	Magnet	Voice coil	Freq. Response	Sensitivity	Edge	RMS Power	Impedance
4" 2-Way	IMPP	5.4 OZ	20mm ASV	80-20Khz	87±3dB/W/m	Rubber edge	15 Watts	4 Ω
5 ¼" 2-Way	IMPP	8 OZ	25mm ASV	65-20Khz	88±3dB/W/m	Rubber edge	20 Watts	4 Ω
6 ½" 3-Way	IMPP	10OZ	25mm ASV	55-20Khz	89±3dB/W/m	Rubber edge	25 Watts	4 Ω
6"x9" 3-Way	IMPP	20OZ	25mm ASV	45-22Khz	91±3dB/W/m	Rubber edge	35 Watts	4 Ω

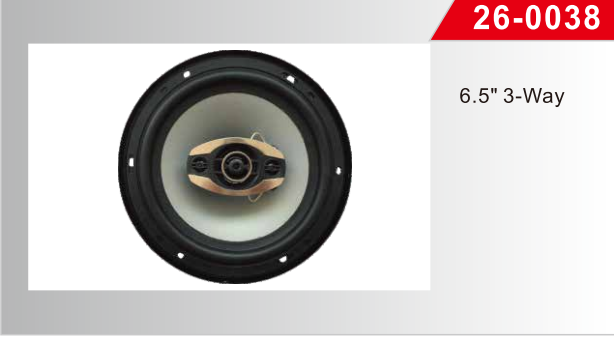

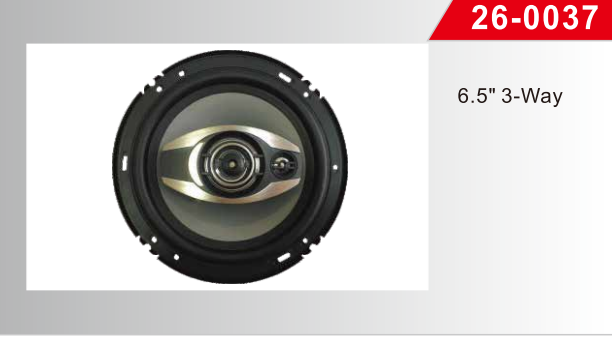

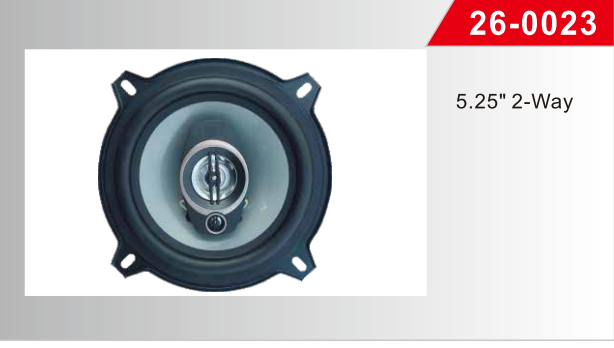





26-1001

6.5"-300W Subwoofer

6.5inch aluminium basket
127mm T-yoke and Washer with black Y35,134mm magnet
Double magnet
20mm+15mm thickness 2inch-4L voice coil
D2 PC spider with 4leads 24threads
Non-pressed pulp cone with foam surround
Normal package
Dustcap and package can print logo



26-1002

12"-800W subwoofer

Voice Coil diameter:75mm
Basv Magnet :180*90*20 Double (127OZ)
Frenquency Range 56Hz-1.5K
Sensitivity: 86+-3dB
Impedance :4+4Ohm
Peak Power : 1800W
Rate Power : 800W
FS:56 Hz
Qts:0.75
Vas:11.275



26-1006

12" Subwoofer 200W

12" Paper Cone With Foam
Edge 2.5" 4-layer BASV Coil
Magnet:Ø156*Ø80*25(Y25) Impedance: 2+2Ohm
MAX Power: 400W
RMS Power : 200W



26-1007

15" Subwoofer 300W

15" Paper Cone With Foam
Edge 3." 4-layer BASV Coil
Magnet:Ø180*Ø90*25(Y25)
Impedance: 2+2Ohm
MAX Power: 600W
RMS Power : 300W

TWEETER



Nominal Impedance: 4--8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 106 db
Frequency Range: 2KHZ-16KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Size: 25*7
Overall Diameter: 58.0mm
Overall Depth: 75.0mm
Net Weight: 0.56kg

30-1001



Nominal Impedance: 4--8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 106 db
Frequency Range: 2KHZ-16KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Size: 25*7
Overall Diameter: 58.0mm
Overall Depth: 75.0mm
Net Weight: 0.56kg

30-1002



Nominal Impedance: 4--8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 106 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Ronud copper wire
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Size: 70*32*10
Overall Diameter: 97.0mm
Overall Depth: 45.0mm
Net Weight: 0.5kg

30-1003



Nominal Impedance: 4--8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 106 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Ronud copper wire
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Size: 70*32*10
Overall Diameter: 97.0mm
Overall Depth: 45.0mm
Net Weight: 0.5kg

30-1004



Nominal Impedance: 4--8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 103 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Ronud copper wire
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Weight: 5.2 Oz
Overall Diameter: 97.0mm
Overall Depth: 45.0mm
Net Weight: 0.4kg

30-1005



Nominal Impedance: 4--8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 106 db
Frequency Range: 2KHZ-16KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Ronud copper wire
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Plastic
Magnet Weight: 5.2Oz
Overall Diameter: 97.0mm
Overall Depth: 45.0mm
Net Weight: 0.4kg

30-1006

TWEETER



Nominal Impedance: 4--8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 106 db
Frequency Range: 2KHZ-16KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Ronud copper wire
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Plastic
Magnet Weight: 5.2Oz
Overall Diameter: 97mm
Overall Depth: 45mm
Net Weight: 0.4kg

30-1007



Nominal Impedance: 4--8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 106 db
Frequency Range: 2KHZ-16KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Ronud copper wire
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Weight: 7.8Oz
Overall Diameter: 80.0mm
Overall Depth: 63.0mm
Net Weight: 0.5kg

30-1008



Nominal Impedance: 4--8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 106 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Ronud copper wire
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Weight: 7.8Oz
Overall Diameter: 80.0mm
Overall Depth: 63.0mm
Net Weight: 0.8kg

30-1009



Nominal Impedance: 4--8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 105 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Ronud copper wire
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Plastic
Magnet Weight: 7.8Oz
Overall Diameter: 80.0mm
Overall Depth: 63.0mm
Net Weight: 0.5kg

30-1010



Nominal Impedance: 4--8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 106 db
Frequency Range: 2KHZ-16KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Ronud copper wire
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Plastic
Magnet Weight: 7.8Oz
Overall Diameter: 80.0mm
Overall Depth: 63.0mm
Net Weight: 0.5kg

30-1011



Nominal Impedance: 4--8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 105 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Ronud copper wire
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Weight: 5.2Oz
Overall Diameter: 95.0mm
Overall Depth: 40.0mm
Net Weight: 0.5kg

30-1012



Nominal Impedance: 4–8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 110 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Size: 25*7
Overall Diameter: 79.0mm
Overall Depth: 52.0mm
Net Weight: 0.55kg

30-1013



Nominal Impedance: 4–8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 109 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Size: 25*7
Overall Diameter: 79.0mm
Overall Depth: 53.0mm
Net Weight: 0.55kg

30-1014



Nominal Impedance: 4–8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 109 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Size: 25*7
Overall Diameter: 79.0mm
Overall Depth: 53.0mm
Net Weight: 0.55kg

30-1015



Nominal Impedance: 4–8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 109 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Size: 25*7
Overall Diameter: 79.0mm
Overall Depth: 53.0mm
Net Weight: 0.55kg

30-1016



Nominal Impedance: 4–8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 106 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Ronud copper wire
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Weight: 5.2Oz
Overall Diameter: 100.0mm
Overall Depth: 85mm
Net Weight: 0.6kg

30-1017



Nominal Impedance: 4–8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 106 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Weight: 15.6Oz
Overall Diameter: 89.0mm
Overall Depth: 78.0mm
Net Weight: 1.4kg

30-1018



Nominal Impedance: 4–8ohm
Power Capacity: 25 RMS W
Sensitivity (1w/1m): 102 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Size: 25*7
Overall Diameter: 58.0mm
Overall Depth: 59.5mm
Net Weight: 0.5kg

30-1019



Nominal Impedance: 4–8ohm
Power Capacity: 25 RMS W
Sensitivity (1w/1m): 102 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Size: 25*7
Overall Diameter: 70.0mm
Overall Depth: 79.0mm
Net Weight: 0.6kg

30-1020



Nominal Impedance: 4–8ohm
Power Capacity: 25 RMS W
Sensitivity (1w/1m): 102 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Size: 25*7
Overall Diameter: 70.0mm
Overall Depth: 79.0mm
Net Weight: 0.6kg

30-1021



Nominal Impedance: 4–8ohm
Power Capacity: 25 RMS W
Sensitivity (1w/1m): 102 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Size: 25*7
Overall Diameter: 58.0mm
Overall Depth: 59.5mm
Net Weight: 0.6kg

30-1022



Nominal Impedance: 4–8ohm
Power Capacity: 25 RMS W
Sensitivity (1w/1m): 102 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Ronud copper wire
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Weight: 5..2Oz
Overall Diameter: 95.0mm
Overall Depth: 40.0mm
Net Weight: 0.52kg

30-1023



Nominal Impedance: 4–8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 106 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Ronud copper wire
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Weight: 5..2Oz
Overall Diameter: 100.0mm
Overall Depth: 85.0mm
Net Weight: 0.6kg

30-1024



Nominal Impedance: 4–8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 106 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Ronud copper wire
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Weight: 7.8Oz
Overall Diameter: 89.0mm
Overall Depth: 78.0mm
Net Weight: 0.53kg

30-1025



Nominal Impedance: 4–8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 105 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Ronud copper wire
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Weight: 5.2Oz
Overall Diameter: 95.0mm
Overall Depth: 40.0mm
Net Weight: 0.5kg

30-1026



Nominal Impedance: 4–8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 105 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Ronud copper wire
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Weight: 5.2Oz
Overall Diameter: 95.0mm
Overall Depth: 40.0mm
Net Weight: 0.5kg

30-1027



Nominal Impedance: 4–8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 106 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Ronud copper wire
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Weight: 5.2Oz
Overall Diameter: 100.0mm
Overall Depth: 40.0mm
Net Weight: 0.6kg

30-1028



Nominal Impedance: 4–8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 105 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 32.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Size: 32*16*7
Overall Diameter: 100.5mm
Overall Depth: 47.0mm
Net Weight: 0.6kg

30-1029



Nominal Impedance: 4–8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 106 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Weight: 5.2Oz
Overall Diameter: 100.0mm
Overall Depth: 85.0mm
Net Weight: 0.6kg

30-1030



Nominal Impedance: 4–8ohm
Power Capacity: 38 RMS W
Sensitivity (1w/1m): 105 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 37.6mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Weight: 11.3Oz
Overall Diameter: 103.0mm
Overall Depth: 69.0mm
Net Weight: 1.3kg

30-1031



Nominal Impedance: 4–8ohm
Power Capacity: 38 RMS W
Sensitivity (1w/1m): 105 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 37.6mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Weight: 11.3Oz
Overall Diameter: 103.0mm
Overall Depth: 69.0mm
Net Weight: 1.3kg

30-1032



Nominal Impedance: 4–8ohm
Power Capacity: 38 RMS W
Sensitivity (1w/1m): 105 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 37.6mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Weight: 11.3Oz
Overall Diameter: 103.0mm
Overall Depth: 69.0mm
Net Weight: 1.3kg

30-1033



Nominal Impedance: 4–8ohm
Power Capacity: 40 RMS W
Sensitivity (1w/1m): 105 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 44.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Weight: 11.3Oz
Overall Diameter: 100.0mm
Overall Depth: 75.0mm
Net Weight: 1.5kg

30-1034



Nominal Impedance: 4–8ohm
Power Capacity: 40 RMS W
Sensitivity (1w/1m): 102 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 44.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Size: 17.3 Oz
Overall Diameter: 110.0mm
Overall Depth: 75.0mm
Net Weight: 2.2kg

30-1035



Nominal Impedance: 4–8ohm
Power Capacity: 40 RMS W
Sensitivity (1w/1m): 102 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 44.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Size: 17.3 Oz
Overall Diameter: 110.0mm
Overall Depth: 75.0mm
Net Weight: 2.2kg

30-1036



Nominal Impedance: 4--8ohm
Power Capacity: 40 RMS W
Sensitivity (1w/1m): 102 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 44.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Size: 11.3 Oz
Overall Diameter: 100.0mm
Overall Depth: 75.0mm
Net Weight: 1.5kg

30-1037



Nominal Impedance: 4--8ohm
Power Capacity: 40 RMS W
Sensitivity (1w/1m): 102 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 44.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Size: 11.3 Oz
Overall Diameter: 100.0mm
Overall Depth: 75.0mm
Net Weight: 1.5kg

30-1038



Nominal Impedance: 4--8ohm
Power Capacity: 40 RMS W
Sensitivity (1w/1m): 106 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 44.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Size: 17.2 Oz
Overall Diameter: 110.0mm
Overall Depth: 75.0mm
Net Weight: 2.2kg

30-1039



Nominal Impedance: 4--8ohm
Power Capacity: 40 RMS W
Sensitivity (1w/1m): 106 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 44.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Size: 11.3 Oz
Overall Diameter: 100.0mm
Overall Depth: 75.0mm
Net Weight: 1.4kg

30-1040



Nominal Impedance: 4--8ohm
Power Capacity: 40 RMS W
Sensitivity (1w/1m): 106 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 44.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Size: 11.3 Oz
Overall Diameter: 90.0mm
Overall Depth: 75.0mm
Net Weight: 1.5kg

30-1041



Nominal Impedance: 4--8ohm
Power Capacity: 43 RMS W
Sensitivity (1w/1m): 100 db
Frequency Range: 2KHZ-16KHZ
Voice Coil Diameter: 44.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Size: 33 Oz
Overall Diameter: 168.0mm
Overall Depth: 92.0mm
Net Weight: 2.3kg

30-1042



Nominal Impedance: 4--8ohm
Power Capacity: 43 RMS W
Sensitivity (1w/1m): 100 db
Frequency Range: 2KHZ-16KHZ
Voice Coil Diameter: 46.0mm
Voice coil Material: Round copper wire
Voice Coil Former: KSV

Diaphragm Material: Phenolic
Housing Material: Plastic
Magnet Weight: 23 Oz
Overall Diameter: 125.0mm
Overall Depth: 63.0mm
Net Weight: 1.4 kg

30-1043



Nominal Impedance: 4--8ohm
Power Capacity: 43 RMS W
Sensitivity (1w/1m): 110 db
Frequency Range: 2KHZ-16KHZ
Voice Coil Diameter: 46.0 mm
Voice coil Material: Round copper wire
Voice Coil Former: KSV

Diaphragm Material: Phenolic
Housing Material: Plastic
Magnet Weight: 10.5Oz
Overall Diameter: 128.0mm
Overall Depth: 90.0mm
Net Weight: 1.5kg

30-1044



Nominal Impedance: 4--8ohm
Power Capacity: 45 RMS W
Sensitivity (1w/1m): 102 db
Frequency Range: 2KHZ-16KHZ
Voice Coil Diameter: 50.8mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Phenolic
Housing Material: Aluminum
Magnet Weight: 10.5 Oz
Overall Diameter: 120.0mm
Overall Depth: 52.0 mm
Net Weight: 1.25 kg

30-1045



Nominal Impedance: 4--8ohm
Power Capacity: 45 RMS W
Sensitivity (1w/1m): 105 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 50.8mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Weight: 10.5 Oz
Overall Diameter: 120.0mm
Overall Depth: 52.0mm
Net Weight: 1.25 kg

30-1046



Nominal Impedance: 4--8ohm
Power Capacity: 48 RMS W
Sensitivity (1w/1m): 105 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 62.0mm
Voice coil Material: Round copper wire
Voice Coil Former: KSV

Diaphragm Material: Phenolic
Housing Material: Plastic
Magnet Weight: 39.8 Oz
Overall Diameter: 180.5 mm
Overall Depth: 79.2 mm
Net Weight: 5kg

30-1047



Nominal Impedance: 4--8ohm
Power Capacity: 50 RMS W
Sensitivity (1w/1m): 110 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 72.0 mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Weight: 45.5 Oz
Overall Diameter: 155.0mm
Overall Depth: 77.0mm
Net Weight: 5.8kg

30-1048

TWEETER



Nominal Impedance: 4--8ohm
Power Capacity: 50 RMS W
Sensitivity (1w/1m): 110 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 72.0 mm
Voice coil Material: CCAW
Voice Coil Former: KSV

30-1049

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Weight:45.5 Oz
Overall Diameter: 155.0mm
Overall Depth: 77.0mm
Net Weight: 5.8 kg



Nominal Impedance: 4--8ohm
Power Capacity: 50 RMS W
Sensitivity (1w/1m): 110 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 72.0mm
Voice coil Material: CCAW
Voice Coil Former: KSV

30-1050

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Weight: 45.5 Oz
Overall Diameter: 180.0mm
Overall Depth: 120.0mm
Net Weight: 45.5kg



Nominal Impedance: 4--8ohm
Power Capacity: 50 RMS W
Sensitivity (1w/1m): 110 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 72.0mm
Voice coil Material: CCAW
Voice Coil Former: KSV

30-1051

Diaphragm Material: Titanium
Housing Material: Aluminum
Magnet Weight: 45.5 Oz
Overall Diameter: 180.0mm
Overall Depth: 120.0mm
Net Weight: 45.5kg

TWEETER



Nominal Impedance: 4--8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 106 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Round copper wire
Voice Coil Former: KSV

30-1052

Diaphragm Material: Silk
Housing Material: Aluminum
Magnet Weight:5.2 Oz
Overall Diameter: 110.0mm
Overall Depth: 38.0mm
Net Weight: 0.55kg



Nominal Impedance: 4--8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 108 db
Frequency Range: 2KHZ-16KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

30-1053

Diaphragm Material: Silk
Housing Material: Aluminum
Magnet Size: 25*3
Overall Diameter: 80.0mm
Overall Depth: 24.0mm
Net Weight: 0.2 kg



Nominal Impedance: 4--8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 107 db
Frequency Range: 2KHZ-16KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

30-1054

Diaphragm Material: Silk
Housing Material: Aluminum
Magnet Size: 25*3
Overall Diameter: 88.0mm
Overall Depth: 24.0mm
Net Weight: 0.25kg



Nominal Impedance: 4--8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 103 db
Frequency Range: 2KHZ-16KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Round copper wire
Voice Coil Former: KSV

30-1055

Diaphragm Material: Silk
Housing Material: Plastic
Magnet Weight: 7.8 Oz
Overall Diameter: 100.0mm
Overall Depth: 32.6mm
Net Weight: 0.56 kg



Nominal Impedance: 4--8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 103 db
Frequency Range: 2KHZ-16KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Round copper wire
Voice Coil Former: KSV

30-1056

Diaphragm Material: Silk
Housing Material: Plastic
Magnet Weight: 7.8 Oz
Overall Diameter: 100.0mm
Overall Depth: 39.0mm
Net Weight: 0.58kg



Nominal Impedance: 4--8ohm
Power Capacity: 25 RMS W
Sensitivity (1w/1m): 102 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Round copper wire
Voice Coil Former: KSV

30-1057

Diaphragm Material: Silk
Housing Material: Plastic
Magnet Weight: 7.8 Oz
Overall Diameter: 100.0mm
Overall Depth: 39.0mm
Net Weight: 0.58kg

TWEETER



Nominal Impedance: 4--8ohm
Power Capacity: 25 RMS W
Sensitivity (1w/1m): 102 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Silk
Housing Material: Plastic
Magnet Weight: 7.8 Oz
Overall Diameter: 103.0mm
Overall Depth: 35.8mm
Net Weight: 0.6kg

30-1058



Nominal Impedance: 4--8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 105 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Round copper wire
Voice Coil Former: KSV

Diaphragm Material: Silk
Housing Material: Plastic
Magnet Weight: 7.8 Oz
Overall Diameter: 103.0mm
Overall Depth: 35.8mm
Net Weight: 0.6kg

30-1059



Nominal Impedance: 4--8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 106 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Round copper wire
Voice Coil Former: KSV

Diaphragm Material: Silk
Housing Material: Plastic
Magnet Weight: 7.8 Oz
Overall Diameter: 103.2mm
Overall Depth: 40.5mm
Net Weight: 0.6kg

30-1060



Nominal Impedance: 4--8ohm
Power Capacity: 30 RMS W
Sensitivity (1w/1m): 106 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Round copper wire
Voice Coil Former: KSV

Diaphragm Material: Silk
Housing Material: Plastic
Magnet Weight: 7.8 Oz
Overall Diameter: 100.0mm
Overall Depth: 35.8mm
Net Weight: 0.6kg

30-1061

TWEETER



Nominal Impedance: 4--8ohm
Power Capacity: 15 RMS W
Sensitivity (1w/1m): 90 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 13.28mm
Voice coil Material: Round copper wire
Voice Coil Former: KSV

Diaphragm Material: Ployester
Housing Material: Plastic
Magnet Size: 12.8*2
Overall Diameter: 39.7mm
Overall Depth: 19.6mm
Net Weight: 0.02kg

30-1062



Nominal Impedance: 4--8ohm
Power Capacity: 17 RMS W
Sensitivity (1w/1m): 90 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 19.4mm
Voice coil Material: Round copper wire
Voice Coil Former: KSV

Diaphragm Material: Silk
Housing Material: Plastic
Magnet Size: 19*3
Overall Diameter: 36.2mm
Overall Depth: 24.3mm
Net Weight: 0.03kg

30-1063



Nominal Impedance: 4--8ohm
Power Capacity: 20 RMS W
Sensitivity (1w/1m): 90 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 19.4mm
Voice coil Material: Round copper wire
Voice Coil Former: KSV

Diaphragm Material: Silk edge Titanium
Housing Material: Plastic
Magnet Size: 25*3
Overall Diameter: 43.7mm
Overall Depth: 30.5mm
Net Weight: 0.05kg

30-1064



Nominal Impedance: 4--8ohm
Power Capacity: 20 RMS W
Sensitivity (1w/1m): 90 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Silk edge Titanium
Housing Material: Aluminum
Magnet Size: 25*5
Overall Diameter: 57.4mm
Overall Depth: 38.8mm
Net Weight: 0.13kg

30-1065



Nominal Impedance: 4--8ohm
Power Capacity: 20 RMS W
Sensitivity (1w/1m): 90 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 13.28mm
Voice coil Material: Round copper wire
Voice Coil Former: KSV

Diaphragm Material: Ployester
Housing Material: Plastic
Magnet Size: 12.8*2
Overall Diameter: 54.5mm
Overall Depth: 22.2mm
Net Weight: 0.03kg

30-1066



Nominal Impedance: 4--8ohm
Power Capacity: 20 RMS W
Sensitivity (1w/1m): 90 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Round copper wire
Voice Coil Former: KSV

Diaphragm Material: Silk
Housing Material: Plastic
Magnet Size: 25*3
Overall Diameter: 47.0mm
Overall Depth: 30.5mm
Net Weight: 0.07kg

30-1067

30-1068



Nominal Impedance: 4–8ohm
Power Capacity: 20 RMS W
Sensitivity (1w/1m): 90 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Round copper wire
Voice Coil Former: KSV

Diaphragm Material: Silk
Housing Material: Plastic
Magnet Size: 25*3
Overall Diameter: 54.0mm
Overall Depth: 27.0mm
Net Weight: 0.05kg

30-1069



Nominal Impedance: 4–8ohm
Power Capacity: 20 RMS W
Sensitivity (1w/1m): 90 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Silk edge titanium
Housing Material: Plastic
Magnet Size: 25*3
Overall Diameter: 54.5mm
Overall Depth: 27.0mm
Net Weight: 0.06kg

30-1070



Nominal Impedance: 4–8ohm
Power Capacity: 20 RMS W
Sensitivity (1w/1m): 90 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Round copper wire
Voice Coil Former: KSV

Diaphragm Material: Silk
Housing Material: Plastic
Magnet Size: 25*3
Overall Diameter: 60.7mm
Overall Depth: 32.5mm
Net Weight: 0.05kg

30-1071



Nominal Impedance: 4–8ohm
Power Capacity: 20 RMS W
Sensitivity (1w/1m): 90 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: Round copper wire
Voice Coil Former: CCAW

Diaphragm Material: Silk edge Titanium
Housing Material: Aluminum
Magnet Size: 25*3
Overall Diameter: 57.3mm
Overall Depth: 22.7mm
Net Weight: 0.10kg

30-1072



Nominal Impedance: 4–8ohm
Power Capacity: 20 RMS W
Sensitivity (1w/1m): 90 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Silk edge Titanium
Housing Material: Aluminum
Magnet Size: 25*3
Overall Diameter: 110.0mm
Overall Depth: 75.0mm
Net Weight: 2.20kg

30-1073



Nominal Impedance: 4–8ohm
Power Capacity: 20 RMS W
Sensitivity (1w/1m): 90 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Silk
Housing Material: Aluminum
Magnet Size: 25*3
Overall Diameter: 65.0mm
Overall Depth: 42.6mm
Net Weight: 0.13kg

30-1074



Nominal Impedance: 4–8ohm
Power Capacity: 20 RMS W
Sensitivity (1w/1m): 90 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Silk
Housing Material: Plastic
Magnet Size: 25*3
Overall Diameter: 58.9mm
Overall Depth: 28.0mm
Net Weight: 0.06kg

30-1075



Nominal Impedance: 4–8ohm
Power Capacity: 20 RMS W
Sensitivity (1w/1m): 90 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Silk
Housing Material: Plastic
Magnet Size: 25*3
Overall Diameter: 57.0mm
Overall Depth: 27.3mm
Net Weight: 0.06kg

30-1076



Nominal Impedance: 4–8ohm
Power Capacity: 20 RMS W
Sensitivity (1w/1m): 90 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Silk
Housing Material: Aluminum
Magnet Size: 25*3
Overall Diameter: 57.0mm
Overall Depth: 23.1mm
Net Weight: 0.11kg

30-1077



Nominal Impedance: 4–8ohm
Power Capacity: 20 RMS W
Sensitivity (1w/1m): 90 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Silk edge Titanium
Housing Material: Aluminum
Magnet Size: 25*3
Overall Diameter: 56.0mm
Overall Depth: 26.5mm
Net Weight: 0.1kg

30-1078



Nominal Impedance: 4–8ohm
Power Capacity: 20 RMS W
Sensitivity (1w/1m): 90 db
Frequency Range: 2KHZ-20KHZ
Voice Coil Diameter: 25.4mm
Voice coil Material: CCAW
Voice Coil Former: KSV

Diaphragm Material: Silk edge Titanium
Housing Material: Aluminum
Magnet Size: 25*3
Overall Diameter: 57.3mm
Overall Depth: 22.7mm
Net Weight: 0.1kg

NEW



Mono block class D Amplifier
RMS Power @4Ω:1*25W,1%THD
RMS Power @2Ω:1*45W,1%THD
Dimension: (L)100mm x76mm(W)×38mm(H)

29-4001

NEW



2 Channels class D Amplifier
RMS Power@4Ω:2*25W,1%THD
Dimension:(L)100mm x76mm(W)×38mm(H)

29-4002

NEW



Mono block class D Amplifier
RMS Power @4Ω:1*180W
RMS Power @2Ω:1*350W
BRIDGE Power@1Ω1*500 W
Dimension:(L)240mmx176mm(W)×46mm(H)

29-4003